

# (12) UK Patent Application (19) GB (11) 2 373 130 (13) A

(43) Date of A Publication 11.09.2002

(21) Application No 0105375.0

(22) Date of Filing 05.03.2001

(71) Applicant(s)

**MessageLabs Limited**  
(Incorporated in the United Kingdom)  
Merchants House, Love Lane, CIRENCESTER, Glos,  
G17 1YG, United Kingdom

(72) Inventor(s)

**Alex Shipp**

(74) Agent and/or Address for Service

**J A Kemp & Co.**  
14 South Square, Gray's Inn, LONDON, WC1R 5JJ,  
United Kingdom

(51) INT CL<sup>7</sup>

**G06F 17/60**

(52) UK CL (Edition T )

**H4K KFMA**

(56) Documents Cited

**GB 2350747 A**

**WO 2001/053965 A1**

**WO 1999/067731 A1**

**WO 1999/032985 A1**

**US 6052709 A**

(58) Field of Search

**UK CL (Edition S ) H4K KFMA**

**INT CL<sup>7</sup> G06F 17/30 17/60 , H04Q 3/00**

**Online: WPI, EPODOC, JAPIO**

(54) Abstract Title

**Method and system for processing e-mail to detect unsolicited bulk and/or commercial e-mail.**

(57) A method for processing e-mail to detect unsolicited bulk and/or commercial e-mail ('spam') and a system therefor, the method comprising the steps of monitoring one or more nodes of a network for patterns of e-mail traffic indicative of a mailshot of unsolicited e-mail and upon detecting such patterns initiating automatic remedial action and/or alerting an operator. The method may comprise the step of decomposing each e-mail received 21 into its constituent parts to search for content indicative of a mailshot and logging data 22 of the decomposed e-mail to a database 23. This logging may be done only in respect of e-mail which meets at least one criterion belonging to a mailshot, e-mail which is not considered part of a mailshot being forwarded for delivery. The method may comprise the step of continually or continuously executing an algorithm 24 against entries in a database to identify patterns of e-mail traffic indicative of a mailshot, the database comprising only recent entries added less than a predetermined time ago. The corrective action may comprise any or all of the steps of at least temporarily stopping the passage of a suspect e-mail, notifying the intended recipient and generating an alarm to alert a human operator.

**Fig.2.**

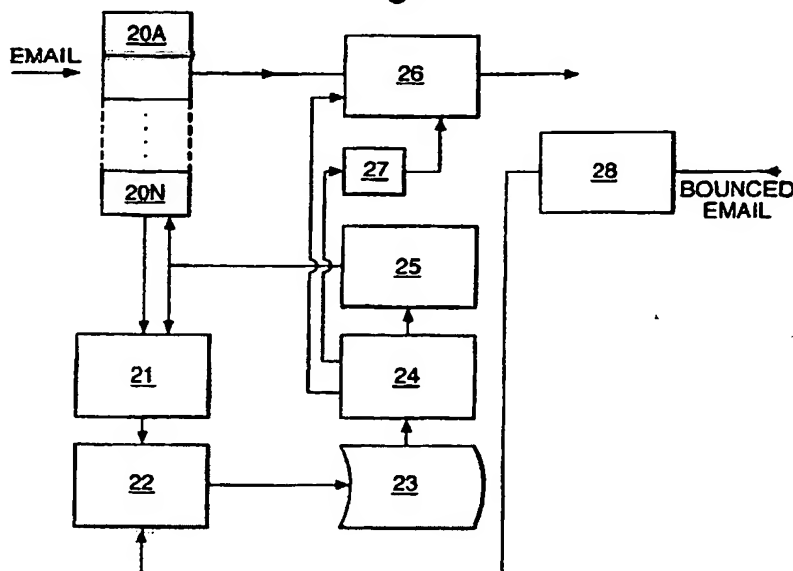


Fig.1.


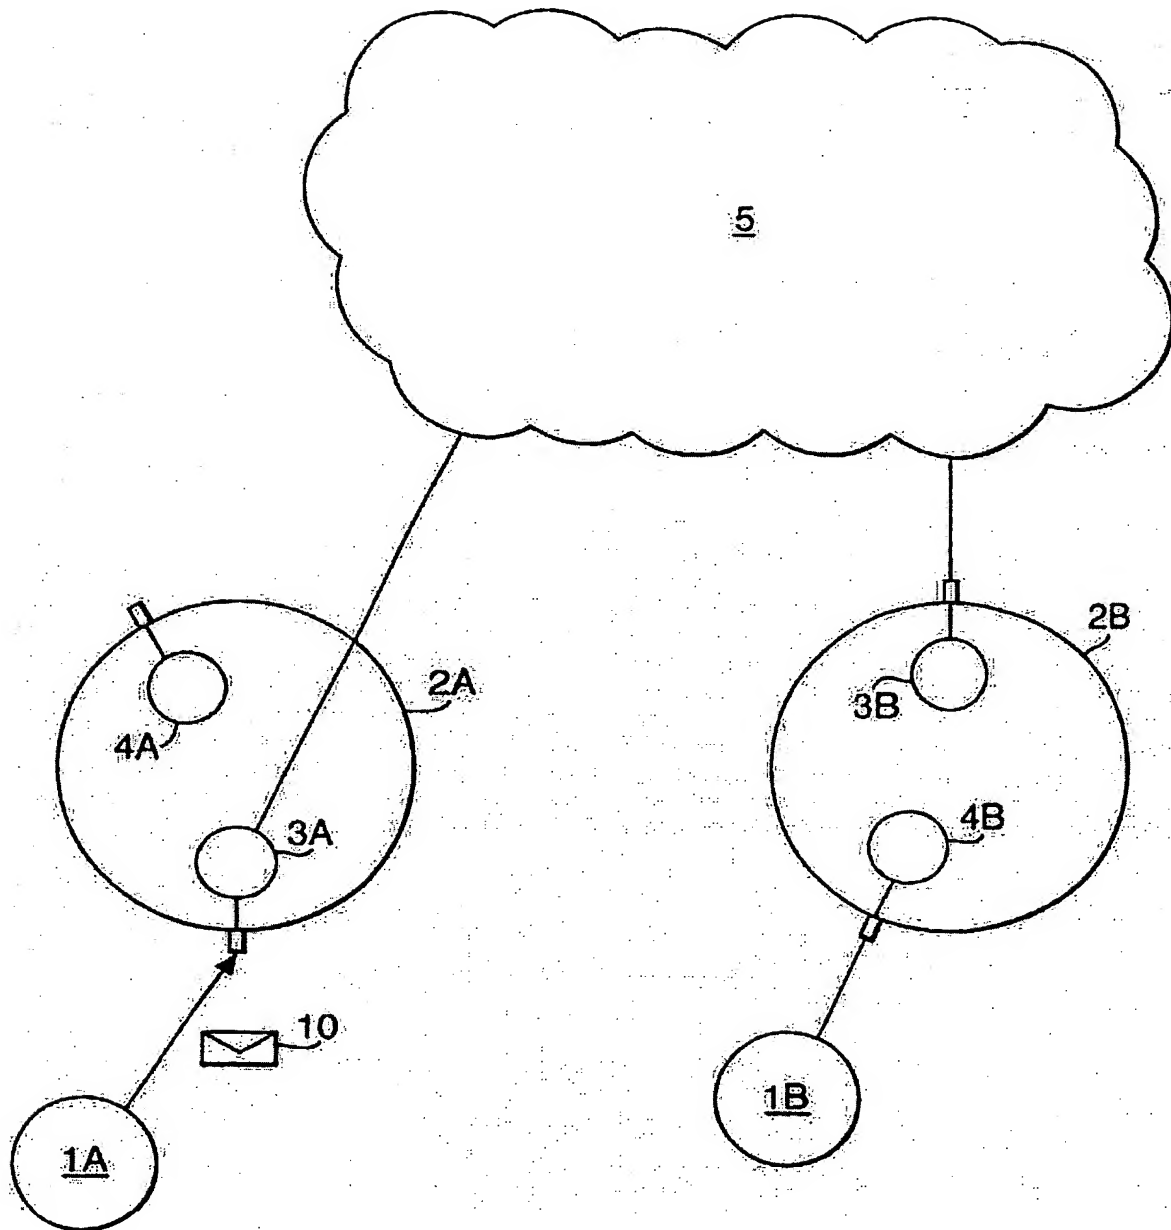


Fig.2.

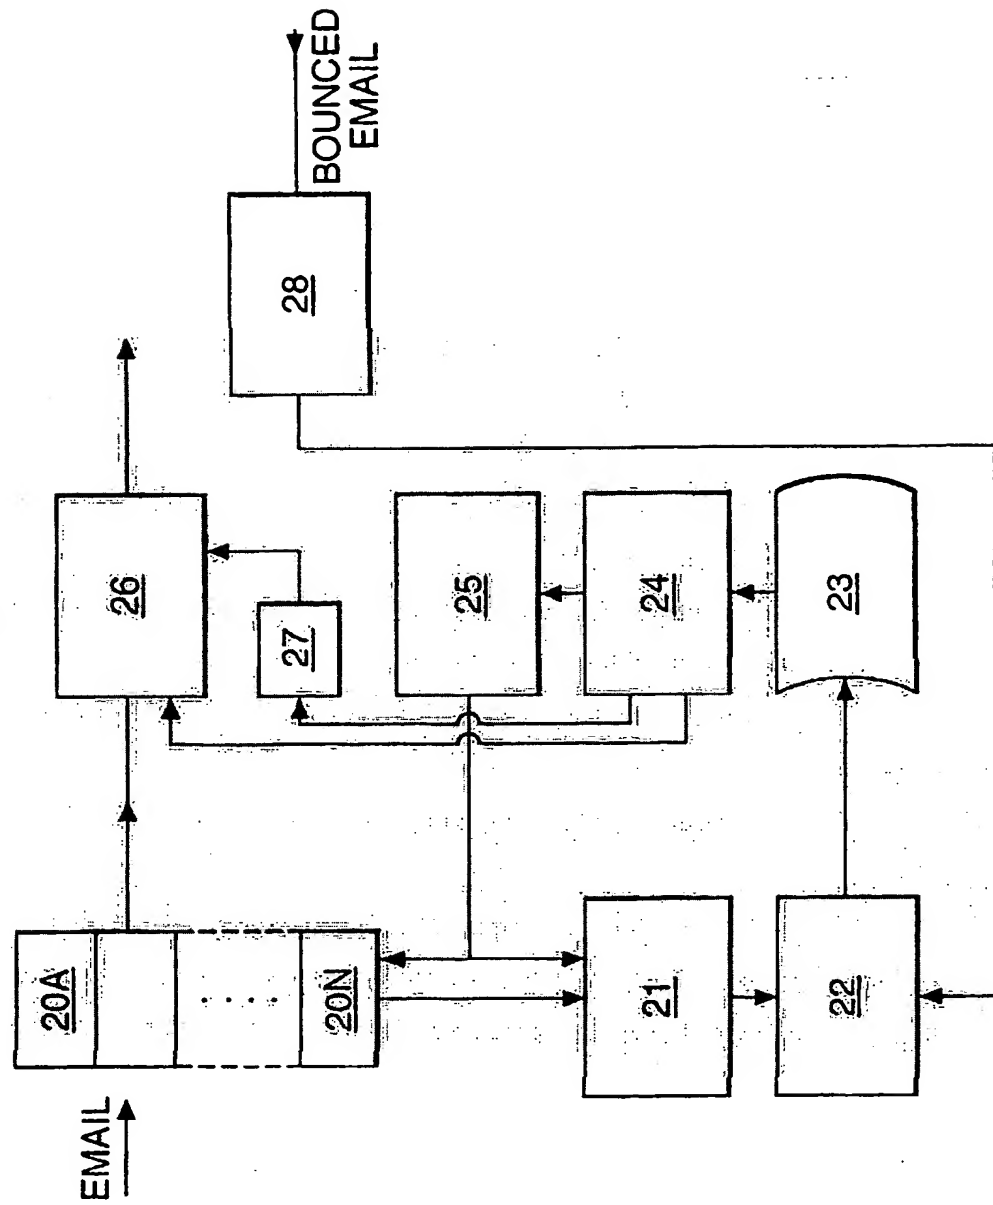

**A METHOD OF, AND SYSTEM FOR, PROCESSING EMAIL  
IN PARTICULAR TO DETECT UNSOLICITED BULK EMAIL**

The present invention relates to a method of, and system for, processing  
5 email in particular to detect unwanted or unsolicited bulk email (UBE) including, but not  
limited to, unwanted or unsolicited commercial email (UCE) and mail bombs.

A typical UCE or UBE consists of tens, hundreds, thousands or more copies  
of the same, or very similar email sent to multiple destinations. A large percentage may  
then bounce back because the recipient's email address no longer exists (or never existed).  
10 Due to the nature of the task, the original emails are not generated individually by hand,  
but by a software package. This package typically mailmerges an email with an address  
list and then sends out the emails. By no means all UBE is commercial, it includes  
religious and similar polemic. On the other hand, there are many legitimate uses of bulk  
email, e.g. so-called "list servers".

15 A typical mail bomb consists of many copies of the same or similar emails  
sent to one email address, or one domain. Due to the nature of the task, these emails are  
generated by a package. These emails may saturate the recipient's email facilities and so  
may be regarded as a "denial of service" attack.

From here, all unwanted mail (UCE, Mailbomb, etc) will be referred to as  
20 spam.

The enjoyment and usefulness of email is harmed by the increasing amount  
of spam.

A variety of techniques have been used to reduce the problem of spam. For  
example, an ISP (or end user) may use software that implements "spam filters". These  
25 may employ textual analysis of the email body, or strategies such as determining whether  
the email comes from a "blacklisted" source (there are a number of on-line Internet  
services which maintain blacklists, such as ORBS, RSS and DUL).

A known technique for stopping mailbombs is to count emails as they arrive  
at a certain destination, and block delivery of them once a threshold is reached.

30 In our copending British Patent Application No. 0016835.1, filed 7 July  
2000, we propose a system for looking for, and acting upon, traffic patterns that indicate,  
or suggest, the transmission of a virus by email. The present invention relates to the

application of that technique to the identification of spam including UBE, UCE and mail bombs.

According to the present invention there is provided a method of processing email which comprises monitoring email traffic passing through one or more nodes of a network for patterns of email traffic which are indicative of, or suggestive of, a mailshot of unsolicited or unwanted email and, once such a pattern is detected, initiating automatic remedial action, alerting an operator, or both.

The invention also provides a system for processing email which comprises means for monitoring email traffic passing through one or more nodes of a network for patterns of email traffic which are indicative of, or suggestive of, a mailshot of unsolicited or unwanted email and once such a pattern is detected, initiating automatic remedial action, alerting an operator, or both.

Other, optional, features of the invention are defined in the sub-claims.

This system thus provides a way of identifying and stopping such unwanted mail by traffic analysis of mail at the network level in particular but not exclusively the Internet level. However, this can also be scaled down to scan at the ISP level, or even at a single company or mailserver if desired. However, it is most useful when done at a multi-ISP, multi country level.

As applied to the Internet, the scanning of traffic in our British Patent Application No. 0016835 has been referred to by the expression "scanning in the sky", the "sky" alluding to the metaphorical Internet "cloud" often used in illustrations of the Internet. This expression is equally applicable to the present invention.

In the present invention, each mail is analysed primarily at the container level, and if likely to be spam, logged. If similar emails are detected, then the system eventually determines the emails are in fact spam, and all future matching emails are stopped. The actual cut-off point for determining when to stop emails depends both on the 'likely-to-be-spam' score and the number of emails received. Thus, some spam may be stopped at the first email. Others may take 10s or 100s. The system can be tuned so that the detection rate improves, and so that the system adapts to match changing behaviour of spammers.

The invention will be further described by way of non-limitative example with reference to the accompanying drawings, in which:-

Figure 1 illustrates the process of sending an email over the Internet; and

Figure 2 is a block diagram of one embodiment of the invention.

Before describing the illustrated embodiment of the invention, a typical process of sending an email over the Internet will briefly be described with reference to Figure 1. This is purely for illustration; there are several methods for delivering and  
5 receiving email on the Internet, including, but not limited to: end-to-end SMTP, IMAP4 and UCCP. There are also other ways of achieving SMTP to POP3 email, including for instance, using an ISDN or leased line connection instead of a dial-up modem connection.

Suppose a user 1A with an email ID "asender" has his account at "asource.com" wishes to send an email to someone 1B with an account "arecipient" at  
10 "adestination.com", and that these .com domains are maintained by respective ISPs (Internet Service Providers). Each of the domains has a mail server 2A,2B which includes one or more SMTP servers 3A,3B for outbound messages and one or more POP3 servers 4A,4B for inbound ones. These domains form part of the Internet which for clarity is indicated separately at 5. The process proceeds as follows:

15                   1. Asender prepares the email message using email client software 1A such as Microsoft Outlook Express and addresses it to "arecipient@adestination.com".

                  2. Using a dial-up modem connection or similar, asender's email client 1A connects to the email server 2A at "mail.asource.com".

                  3. Asender's email client 1A conducts a conversation with the SMTP  
20 server 3A, in the course of which it tells the SMTP server 3A the addresses of the sender and recipient and sends it the body of the message (including any attachments) thus transferring the email 10 to the server 3A.

                  4. The SMTP server 3A parses the TO field of the email envelope into a) the recipient and b) the recipient's domain name. It is assumed for the present purposes  
25 that the sender's and recipients' ISPs are different, otherwise the SMTP server 3A could simply route the email through to its associated POP3 server(s) 4A for subsequent collection.

                  5. The SMTP server 3A locates an Internet Domain Name server and obtains an IP address for the destination domain's mail server.

30                   6. The SMTP server 3A connects to the SMTP server 3B at "adestination.com" via SMTP and sends it the sender and recipient addresses and message body similarly to Step 3.

7. The SMTP server 3B recognises that the domain name refers to itself, and passes the message to "adestination"'s POP3 server 4B, which puts the message in "arecipient"'s mailbox for collection by the recipients email client 1B.

Referring now to Figure 2, this shows in block form the key sub-systems of  
5 an embodiment of the present invention. In the example under consideration, i.e. the processing of email by an ISP, these subsystems are implemented by software executing on the ISP's computer(s). These computers operate one or more email gateways  
20A ... 20N passing email messages such as 10.

The various subsystems of the embodiment will be described in more detail  
10 later, but briefly comprise:

A message decomposer/analyser 21, which decomposes emails into their constituent parts, and analyses them to assess whether they are candidates for logging;

A logger 22, which prepares a database entry for each message selected as a logging candidate by the decomposer/analyser 21;

15 A database 23, which stores the entries prepared by the logger 22;

A searcher 24, which scans new entries in the database 23 searching for signs of spam traffic;

A stopper 25, which signals the results from the searcher 24 and optionally stops the passage of emails which conform to criteria of the decomposer/analyser 21 as  
20 indicating unwanted mail;

A mail queuing system 26 (optional) for queuing email while it is processed by the above times, prior to delivering or forwarding;

A purger 27 (optional) which purges queued mail matching stop signatures;

25 A bounce analyser 28 (optional) which logs mail that bounces to the database.

The message decomposer/analyser 21 decomposes emails into their constituent parts, and analyses them to assess whether they are candidates for logging. The analyser may also perform more detailed analysis of particular messages following feedback from the stopper 25.

30 The illustrated embodiment applies a set of heuristics to identify potential spam. The following is a non-exhaustive list of criteria by which emails may be assessed in order to implement these heuristics. Other criteria may be used as well or instead.

1. **It is addressed to many recipients.**

The addresses can be determined by parsing fields, such as To, Cc and Bcc in the email header and by analysing the email envelope. The number of addresses can simply be counted.

5

2. **It is addressed to recipients *or organisations* in a) alphabetical or b) reverse alphabetical order.**

Once the addresses have been extracted as per Item 1 above, it is a simple matter to determine whether they are in any of these orders. Any ordering suggests that the addressee list was derived from a mailing list, possibly of the sort commonly used to generate bulk emails.

10

3. **It contains structural quirks**

Most emails are generated by tried and tested applications. These applications will always generate email in a particular way. It is often possible to identify which application generated a particular email by examining the email headers and also by examining the format of the different parts. It is then possible to identify emails which contain quirks which either indicate that the email is attempting to look as if it was generated by a known emailer, but was not, or that it was generated by a new and unknown mailer, or by an application (which could be a virus or worm). All are suspicious.

15

20

Examples:

**Inconsistent capitalisation**

25

from: alex@star.co.uk

To: alex@star.co.uk

The from and to have different capitalisation

**Non-standard ordering of header elements**

30

Subject: Tower fault tolerance

Content-type: multipart/mixed; boundary = " = = = = = \_962609498 = = \_"

Mime-Version: 1.0

The Mime-Version header normally comes before the Content-Type header.



### **Missing or additional header elements**

X-Mailer: QUALCOMM Windows Eudora Pro Version 3.0.5 (32)

Date: Mon, 03 Jul 2000 12:24:17 +0100

Eudora normally also includes an X-Sender header

5

#### **4. It contains unusual message headers**

This would include headers that are rarely or never generated by normal email engines such as Outlook Notes or Eudora or where standard information is missing.

10

#### **5. It originates from particular IP addresses or IP address ranges.**

The IP address of the originator is, of course, known and hence can be used to determine whether this criterion is met.

#### **6. It contains specialised constructs**

15

Some email uses HTML script to encrypt the message content. This is intended to defeat linguistic analysers. When the mail is viewed in a mail client such as Outlook, the text is immediately decrypted and displayed. It would be unusual for a normal email to do this.

Some email uses HTML references to web pages to track whether the email has been read. It would be unusual for a normal email to do this.

20

#### **7. The text body is susceptible to particular linguistic analysis.**

Once the text body has been parsed out of the email it can be analysed and scored in a variety of ways, for example:

25

- analysis by reference to established stylistic and content metrics, for example Gunning's Fog Index or Fry's Readability Graph. Analysis can establish whether the style indicates that it originated in the scientific community, the civil services, etc.

30

- analysis to determine whether the message body contains certain keywords or keyphrases.

**8. Empty message sender envelopes**

An email normally indicates the originator in the Sender text field and spam originators will often put a bogus entry in that field to disguise the fact that the email is spam. However, the Sender identity is also supposed to be specified in the protocol under which SMTP processes talk to one another in the transfer of email, and this criterion is concerned with the absence of the sender identification from the relevant protocol slot, namely the Mail From protocol slot.

**9. Invalid message sender email addresses**

This is complementary to item 8 and involves consideration of both the sender field of the message and the sender protocol slot, as to whether it is invalid. The email may come from a domain which does not exist or does not follow the normal rules for the domain. For instance, a HotMail address of "123@hotmail.com" is invalid because HotMail addresses cannot be all numbers.

A number of fields of the email may be examined for invalid entries, including "Sender", "From", and "Errors-to".

**10. Message sender addresses which do not match the mail server from which the mail is sent.**

The local mail server knows, or at least can find out from the protocol, the address of the mail sender, and so a determination can be made of whether this matches the sender address in the mail text.

**11. Message has a particular container format.**

An email has a specific number of attachments (currently spam usually has no attachments) and specific encoding methods for its fields which can be assessed for their likelihood of indicating spam. Other similar characteristics which can be assessed include:

- the "message boundary" which the email specifies in the header as a delimiter of subsequent fields of the message.
- the "message ID" which is supposed to be a text string which uniquely identifies a particular instance of an email.

Bulk mail may contain the same message ID in some or all email instances.

Each of the above criteria is assigned a numerical score, and an algorithm is used by analyser 21 to determine whether this mail is a candidate for logging. This algorithm will need to evolve over time to track changes in spamming patterns. The intention is to weed out candidates for logging so that normal mail is not logged. This reduces the burden on the database 23, and improves performance. However, this step is not a requirement. The system will work perfectly well if all emails are logged. A simplistic algorithm would be:

If mail contains attachments, do not log (spam mail currently does not contain attachments).

If mail is over a certain size, do not log (spam mail is generally small, to keep the sender's overheads down).

If mail structure indicates it was generated by a common mail client, such as Outlook or Eudora, do not log (spam mail is generally generated by a specialist package).

Each UCE/Mailbomb package will construct the emails in a certain way, and by analysing the message container it is possible to identify the mail as being generated by either a particular package, or one of a series of packages, e.g. different release versions of the generator package.

The analyser also generates a series of values to enable the recognition of the email, or similar emails, if they recur. The values may include, but are not limited to:

The subject line, digest of subject line, digest of partial subject line.

Digest of text, digest of first, middle and last part of text.

Sender

Originating IP address

Path mail has taken

Structural format indicators

Structural quirk indicators

The digests may be of MD5 type, i.e. text strings derived using a one way hashing function from the field in question.

The logger 22 will log these to the database, together with other factors which may help future analysis, such as:

Number of recipients

Whether recipients are in alphabetical, or reverse alphabetical order

Time of logging

Linguistic analysis indicators

5                   Message sender details

Old log entries are periodically deleted. Spam changes on a daily basis, and old log entries are no longer useful. As regards multi-tier logging, it is possible to contemplate embodiments in which email streams are analysed and processed at a number of sites, but with the logging, traffic analysis and spam identification centralised.

10                   The searcher 24 periodically queries the database searching for recent similar messages and generating a score by analysing the components. Depending on the score, the system may identify a definite threat, or a potential threat. A definite threat causes a signature to be sent back to the stopper 25 so that all future messages with that characteristic are stopped. A potential threat can cause a signature to be sent back to the  
15 stopper 25 so that the next message with that characteristic is analysed in more detail, performing more time consuming linguistic analysis than before. A potential threat can also cause an alert to be sent to an operator, who can then decide to treat it as if it were a definite threat, to flag it as a false alarm so no further occurrences are reported, or to wait and see. The stopper 25 responds appropriately to the operator's instructions if action is  
20 necessary.

The following criteria can be used at the multiple email level:

They contain the same, or similar subject line

They contain the same or similar body text

They are addressed to many recipients

25                   They are addressed to recipients in alphabetical, or reverse alphabetical order

They contain the same structural format

They contain the same structural quirks

They contain the same unusual message headers

30                   They originate from the same IP address, or IP address range

They contain specialised constructs

The body text is susceptible to linguistic analysis

Empty message sender envelopes

Invalid message sender email addresses

Message senders addresses which do not match the mail server from which the mail is arriving

Number of bounces of this email, and reason for bounce

5 They come from the same IP address, but have different sender addresses

The searcher 24 can be configured with different parameters, so that it can be more sensitive if searching logs from a single email gateway, and less sensitive if processing a database of world-wide information.

10 Each criterion can be associated a different score.

The time between searches can be adjusted.

The time span each search covers can be adjusted and multiple time spans accommodated.

Overall thresholds can be set

15 The stopper 25 takes signatures from the searcher 24. The signature identifies characteristics of emails which must be stopped, or which must be investigated further. On receiving a stop signature, all future emails matching this signature as detected by the analyser 21 are stopped. Current queued emails matching this signature are deleted by the purger. Old stopper signatures are periodically deleted.

20 On receiving an investigation signature, the next email that matches this signature is investigated more fully, and the signature then discarded. Depending on the time needed, this investigation need not interrupt the flow of mail - the mail in question can be copied and analysed either by a separate process on the mail server, or even on another machine. Since many mail servers may receive an email matching the signature at roughly the same time, the recommended approach is for these machines not to do the analysis themselves, but to copy the mail to another machine for analysis. This does not impact the flow of mail, and ensures that analysis work is not duplicated. If analysis work proves to be time-consuming, it is also recommended that the logger 22 flags that the particular mail is now under analysis. The stopper 25 can then update all the other mail servers so that they do not try and analyse the same email. The results of the analysis are then passed back to the logger 22.

30 The bounce analyser 28 signals to the logger 22 if an email cannot be delivered to the next mailserver in the delivering route. Normally, only emails which have

already been flagged by the analyser 21 as 'interesting' need be logged. To make the system more sensitive, all emails may be logged. Only certain non-delivery conditions need be flagged. For instance, if the next mail server is not available, this is not interesting. However, if the mail server rejected mail because the recipient address was not valid, this is interesting.

The purger 27 (optional component) removes mail held in the mail queue at 26 and which has not been delivered yet, but which matches any stopper signatures.

Where the analyser 21 operates on emails in the live email stream (rather than on copies) the system may append text to the message body to indicate that the email has been scanned for spam. The system may also generate reports sent to end users, for example, indicating the number of messages blocked, or referring the user to retrieve them (assuming provision is made to temporarily store blocked emails).

## CLAIMS

1. A method of processing email which comprises monitoring email traffic passing through one or more nodes of a network for patterns of email traffic which are  
5 indicative of, or suggestive of, a mailshot of unsolicited or unwanted email and, once such a pattern is detected, initiating automatic remedial action, alerting an operator, or both.
2. A method according to claim 1 which comprises decomposing each email into its constituent parts, analysing one or more of the decomposed constituent parts for  
10 content taken to be indicative of that email belonging to such a mailshot and logging data of the decomposed email to a database.
3. A method according to claim 2, wherein data is logged only in respect of email which, on analysis, meets at least one criterion met by email belonging to such a  
15 mailshot.
4. A method according to claim 1, 2 or 3 and including the step of delivering, or forwarding for delivery, email not considered to belong to such a mailshot.
- 20 5. A method according to claim 2, 3 or 4 and including the step of continually or continuously executing an algorithm against entries in a database to identify patterns of email traffic taken to be indicative of, or suggestive of such a mailshot.
6. A method according to claim 5, wherein the database algorithm examines,  
25 principally or exclusively, only "recently" added database entries, i.e. entries which have been added less than a predetermined time ago.
7. A method according to any one of the preceding claims wherein the corrective action includes any or all of the following, in relation to each email which  
30 conforms to the detected pattern:
  - a) at least temporarily stopping the passage of the emails
  - b) notifying the intended recipient(s)
  - c) generating a signal to alert a human operator.

8. A system for processing email which comprises means for monitoring email traffic passing through one or more nodes of a network for patterns of email traffic which are indicative of, or suggestive of, a mailshot of unsolicited or unwanted email and once such a pattern is detected, initiating automatic remedial action, alerting an operator, or  
5 both.

9. A system according to claim 8 which comprises means for decomposing each email into its constituent parts, means for analysing one or more of the decomposed constituent parts for content taken to be indicative of that email being of such a mailshot  
10 and logging data of the decomposed email to a database.

10. A system according to claim 9 and including means for continually or continuously executing an algorithm against entries in the database to identify patterns of email traffic taken to be indicative of a mailshot of unsolicited emails.

15 11. A system according to claim 10, wherein the database algorithm examines, principally or exclusively, only "recently" added database entries, i.e. entries which have been added less than a predetermined time ago.

20 12. A system according to claim 9, 10, or 11, wherein data is logged only in respect of email which, on analysis, meets at least one criterion met by email belonging to such a mailshot.

13. A system according to claim 9, 10, 11, or 12 and including the step of  
25 delivering, or forwarding for delivery, email not considered to belong to such a mailshot.

14. A system according to any one of claims 8 to 13 wherein the corrective action includes any or all of the following, in relation to each email which conforms to the detected pattern:

- 30
- a) at least temporarily stopping the passage of the emails
  - b) notifying the intended recipient(s)
  - c) generating a signal to alert a human operator.



15. A method substantially as hereinbefore described with reference to and as illustrated in the accompanying drawings.

16. A system constructed and arranged to operate substantially as hereinbefore  
5 described with reference to and as illustrated in the accompanying drawings.



Application No: GB 0105375.0  
Claims searched: 1-16

Examiner: Mike Leaning  
Date of search: 29 November 2001

## Patents Act 1977 Search Report under Section 17

### Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK Cl (Ed.S): H4K (KFMA)

Int Cl (Ed.7): G06F (17/30, 17/60; H04Q (3/00)

Other: Online: WPI, EPODOC, JAPIO

### Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
X	GB 2350747 A (INTERNATIONAL BUSINESS MACHINES CORPORATION) Whole document relevant. See especially page 11 lines 5-29 page 13 lines 11-21 and page 23 lines 6-20.	1-5,7-10 &12-14
X,E	WO 01/53965 A1 (ODYSSEY DEVELOPMENT PTY. LTD.) Whole document is relevant. Note especially pages 2-6, page 8 and page 11 lines 8-10, 10-11 and 18&19.	1-14
X	WO 99/67731 A1 (MICROSOFT CORPORATION) Whole document is relevant but note especially parts the summary of the invention on pages 10-14 and figure 3a, in particular parts 220 & 230 which appear to be decompilers and spam folder 227 were spam is 'logged'.	1-14
A	WO 99/32985 A1 (McCORMICK et al.) Uses simple 'address lists' as filtering means. See figure 1.	
X	US 6052709 (PAUL) Whole document is relevant. See especially column 2 lines 17-22, column 5 lines 1-20, column 6 lines 9-11 & 11-14 and the passage bridging columns 6 & 7.	1-14

X Document indicating lack of novelty or inventive step

Y Document indicating lack of inventive step if combined with one or more other documents of same category.

& Member of the same patent family

A Document indicating technological background and/or state of the art.  
P Document published on or after the declared priority date but before the filing date of this invention.

E Patent document published on or after, but with priority date earlier than, the filing date of this application.



INVESTOR IN PEOPLE

Application No: GB 0105375.0  
Claims searched: 1-16

16

Examiner: Mike Leaning  
Date of search: 29 November 2001

Category	Identity of document and relevant passage	Relevant to claims

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.

